

Filterpure FB bag filter housings

FILTERPURE®

The comprehensive filter cartridge range

Ver 2, Oct 2006



Designed for industrial and commercial filtration applications with heavy-duty 304L stainless steel construction. Stainless steel filter baskets are standard. Inlet and outlet fittings are readily accessible for easy installation. Hold down springs and clamp closures are standard for superior sealing. Sanitary fittings and electro-polishing are available options.


Specifications

Model	FB1	FB2
Closure type	Clamp	Clamp
Flow rate, max L/min	340	680
Flow rate, max m ³ /hr	20	40
Standard bag size (mm)	178 x 406	178 x 813
Number of bags	1	1
Standard pipe size	2" BSP	2" BSP
Standard drain size	1/2" BSP	1/2" BSP
Pressure rating kPa (psi)	1020 (150)	1020 (150)
Temperature rating (°C)*	150	150
Shipping weight (kg)	17.2	21.7

*Housing only. Flow rates are guidelines only. Actual flow rates are based on fluid, viscosity, cartridge, micron rating of the filter bag and other factors.

Dimensions (mm)

Model	A	B	Dia
FB1	762	549	203
FB2	1168	955	203

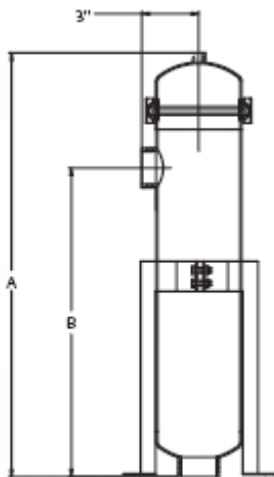

Clamp lid



Stainless steel



Adjustable Legs

