

# FREEFLO FB Bag Housings


## Freeflo FB bag filter housings

Designed for industrial and commercial filtration applications with heavy-duty 304L stainless steel construction. Stainless steel filter baskets are standard. Inlet and outlet fittings are readily accessible for easy installation. Hold down springs and clamp closures are standard for superior sealing. Sanitary fittings and electro-polishing are available options.

### Specifications

	FB1	FB2
Model number	FB1	FB2
Closure type		Clamp
Flow rate, max L/min	340	680
Flow rate, max m <sup>3</sup> /hr	20	40
Standard bag size (mm)	178 x 406	178 x 813
Number of bags		1
Standard pipe size		2" BSP
Standard drain size		1/2" BSP
Pressure rating kPa (psi)		1020 (150)
Temperature rating (°C)*		150
Shipping weight (kg)	17.2	21.7

\*Housing only. Flow rates are guidelines only. Actual flow rates are based on fluid, viscosity, cartridge, micron rating of the filter bag and other factors.

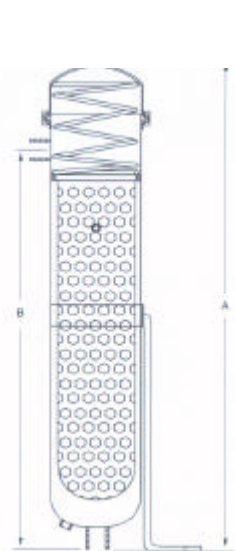

Clamp lid



Stainless steel baskets



Adjustable Legs



### Dimensions (mm)

Model	A	B	Dia
FB1	762	549	203
FB2	1168	955	203